



Professional Audio System

TX.215



Technical Specifications

System :	Single-amp/ bi-amp enclosure
Transducers/Power :	
LF :	2x 15in- 900w/ 4 ohm
HF :	1x 3in - 800w/ 8 ohm
Fre. Response	40Hz~18kHz
Xover:	By external processor
Low:	LPF- 1.2kHz / HPF- 45Hz
Hi:	LPF- 18kHz / HPF- 1.2kHz
Impedance :	4 ohm
Sensitivity :	98 dB (1w 1m)
Max. SPL :	132 dB
Dispersions :	60° x 40° (H x V)
Material :	13-ply 15mm birch wood
Finish :	Black texture paint
Rigging :	14x M10 suspension points
Connectors :	2x NL4 speakon
Dimensions :	476 x 1250 x 443 mm
Net weight :	53.5 kgs

Product Descriptions

TX series cabinet is designed to meet high demands application including indoor and outdoor purposes. All TX cabinets are able to single-amp or bi-amp operating modes by using built in passive crossover or external processor respectively controlled by a selector switch. Rotatable horn provides user for mounting options.

TX.215 is configured by 2x 15in 100mm voice coil woofer & 1x 3in HF driver to achieve its highest performance as possible.. Flexible rigging suspension hardware structures provide contractor with easy, fast & safety handling either for mobile or fixed installation


Features

- Single-amp & bi-amp operating mode selectable
- Passive mode with build-in crossover
- Powerful & high SPL, long throw
- Narrow profile enclosure
- Space saving for mobile & storage
- Weather resistant
- Flexible rigging structure

Applications

- Small to big venue, fixed installation
- Touring & performing art
- Mobile and Live musical event
- Houses of worship
- Hotel ballroom and conference

Frequency Response Curve

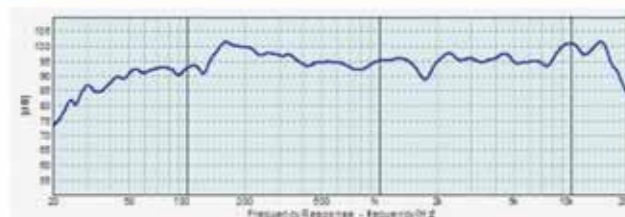

Dimensional Drawings

