




## Professional Audio System

# M-15x

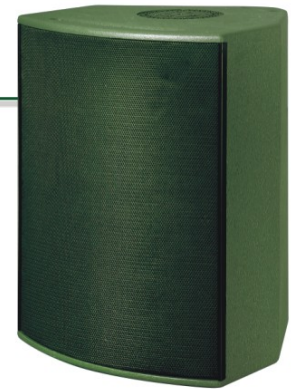

# Stage Monitor

## Enclosure System



### Technical Specifications

- System :** Single-amp coaxial enclosure
- Transducers/Power :**
  - LF :** 1x 15in- 350w/ 8 ohm
  - HF :** 1x 3in - 80w/ 8 ohm
- Fre. Response :** 55Hz~18kHz
- Impedance :** 8 ohm
- Sensitivity :** 97 dB (1w 1m)
- Calculated Max. SPL :** 129 dB
- Dispersions :** 50° conical
- Enclosure shape:** Trapezoidal- bi-angle wedge
  - Material :** 13-ply 15mm birch wood
  - Finish :** Black texture paint/ custom
  - Rigging :** Custom suspension points
- Connectors :** 2x NL 4 speaker
- Dimensions (WxHxD):** 440x580x440mm
- Net weight :** 30 kgs

### Features


- High handling power and SPL
- Bi-angle directivity
- Compact design for all events
- All-purpose usage

### Applications

- Small to medium venues, FOH/Monitor
- Performing Art , public address
- Mobile and live musical event
- Houses of worship & theatre
- Hotel ballroom and conference
- Mobile Dj functions



### Frequency Response Curve

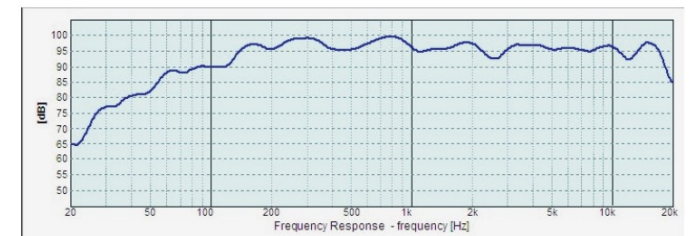

### Dimensional Drawings

